



**DIPLOMATIC
HYDRAULICS**

P2A*L

MANIFOLDS FOR CETOP 03 VALVES WITH SIDE PORTS SERIES 11


- The P2A*L series of manifolds is designed for connection in parallel of two or more CETOP 03 valves.
- The monocast design enables the simple creation of circuits without the use of pipes and fittings, thereby reducing overall dimensions to a minimum.
- All sections feature a common pressure and discharge fitting on both ends of the subplate.
- Maximum flow rate can be increased up to double the output if the sub-plates are powered at both ends.
- Each section is fitted with work ports A and B positioned on the side of the sub-plate.
- Subplates are available in aluminium.

p max 210 bar

Q max 50 l/min

Performance ratings			
Maximum operating pressure	- P-A-B ports - T port	bar bar	210 140
Maximum flow		l/min	50
Ports dimensions:	P - port (pressure) T - port (drainage) A - port B - port	BSP BSP BSP BSP	1/2" 1/2" 3/8" 3/8"
Ambient temperature range		°C	-20 ÷ +50
Fluid temperature range		°C	-20 ÷ +80
Fluid viscosity range		cSt	10 ÷ 400
Recommended viscosity		cSt	25
Fluid contamination range	According to NAS 1638 class 10		

1 - IDENTIFICATION CODE

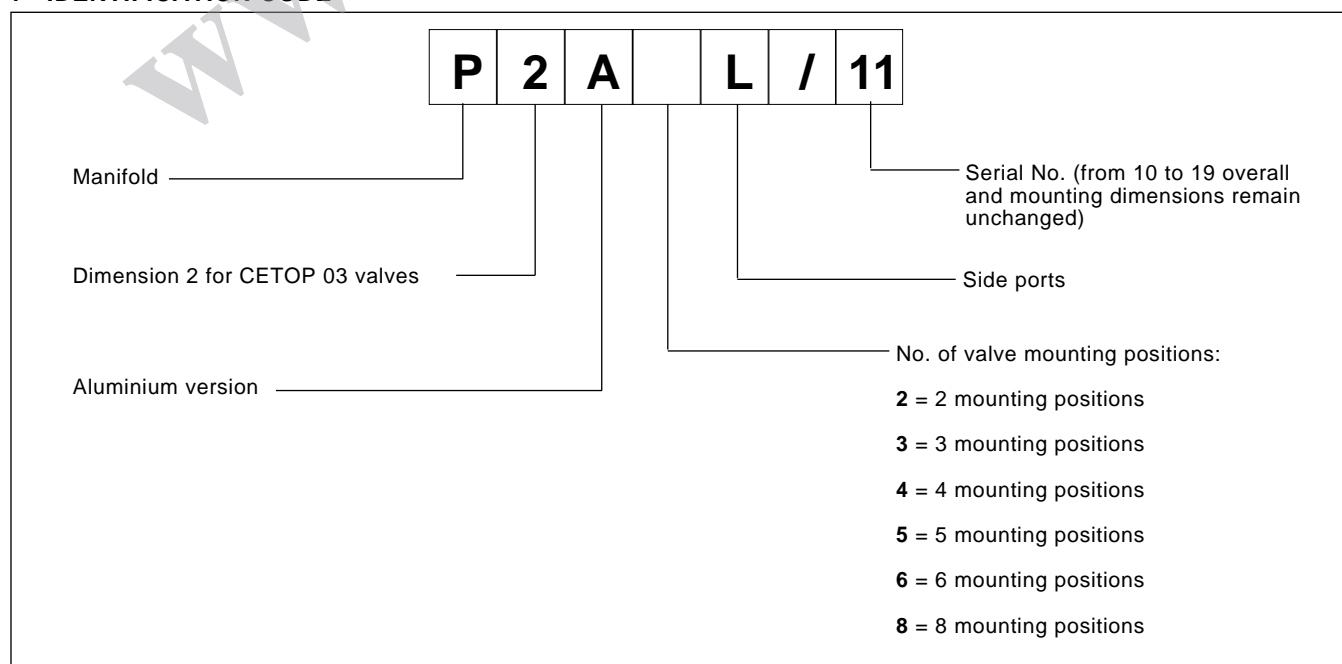




P2A*L

SERIES 11

2 - OVERALL AND MOUNTING DIMENSIONS

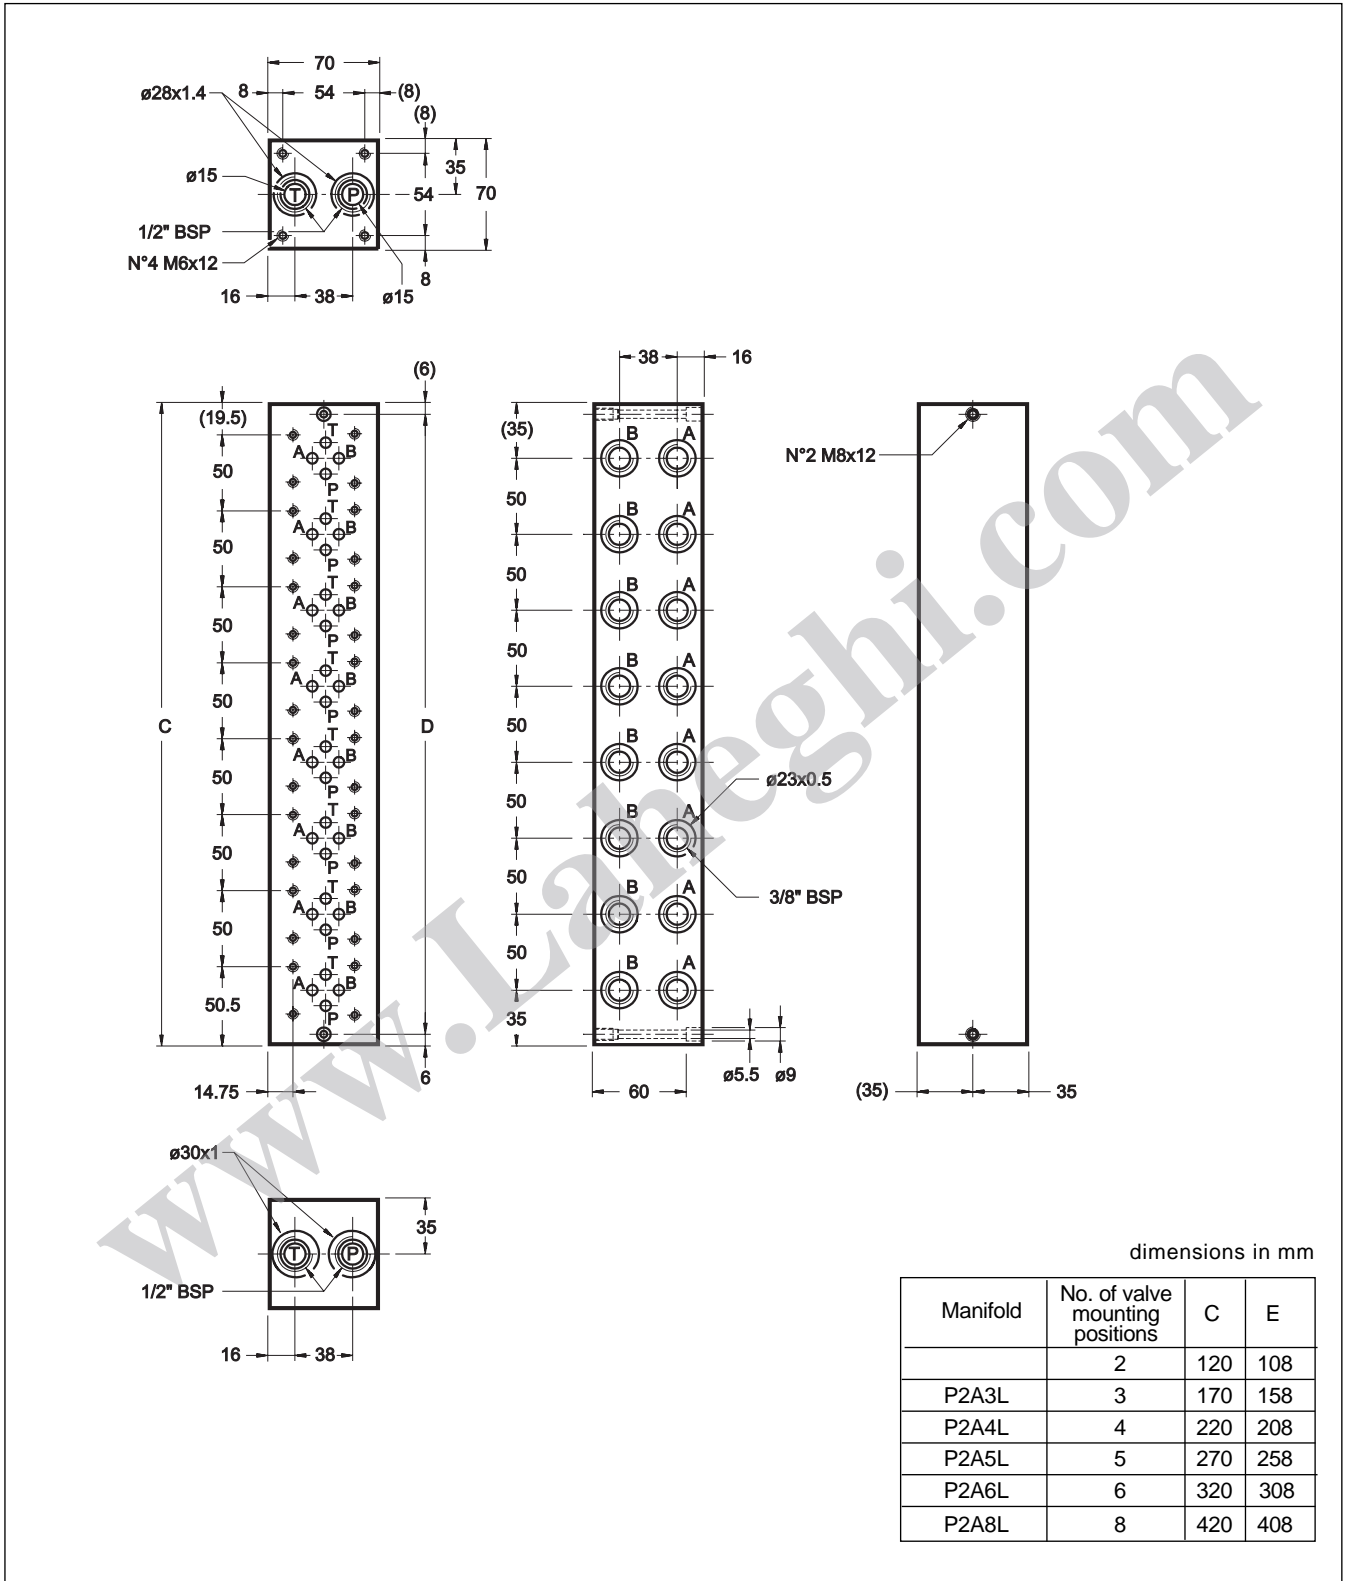

DIPLOMATIC OLEODINAMICA SpA
 20025 LEGNANO (MI) - P.le Bozzi, 1 / Via Edison
 Tel. 0331/472111-472236 - Fax 0331/548328