



CU Series Free Installation Cylinder

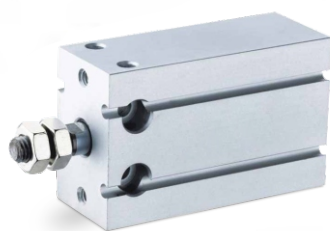

CDU 25 x 30

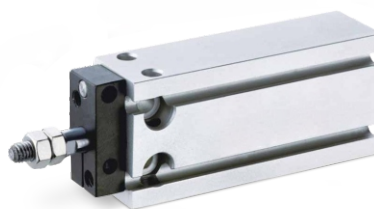

CDUK 16 x 30

Ordering Code

CU

Series Code

CU:Normal Type
CDU:Attach
Magnet Type

□

Kinds

Blank:Normal Type
K:Non-Rotating
Piston Rod Type

10

Cylinder Bore

6mm
10mm
16mm
20mm
25mm
32mm

×

30

Stroke

0-50mm

□

Action

D:Double Action
S:Single Action Spring
Drawing-in Type
T:Single Action Spring
Extrusion Type

Specification

| Bore(mm) | | 6 | 10 | 15 | 20 | 25 | 32 |
|---|--------|---|---------|----|----|---------|----|
| Working Medium | | Air | | | | | |
| Motion Pattern | | Double action/Single Action Extrusion type/Single Action Drawing-in Type | | | | | |
| Ensured Pressure Resistance | | 1.05Mpa(10.5kgf/cm ²) | | | | | |
| Max. Working-pressure | | 0.7Mpa(7.1kgf/cm ²) | | | | | |
| Min. operating pressure | Single | 0.2MPa | 0.15MPa | | | 0.13MPa | |
| | Double | 0.12MPa | 0.06MPa | | | 0.05MPa | |
| Ambient and Medium Temperature | | Without auto switch:-10-70°C (No freezing) With auto switch:-10-60°C (No freezing) | | | | | |
| Lubrication | | Non-lube | | | | | |
| Piston speed | | 50-500 mm/s | | | | | |
| Cushion | | Rubber bumper ^{Note)} | | | | | |
| Rod end thread | | Male thread | | | | | |
| Thread tolerance | | Class 2 | | | | | |
| Cushion | | Both ends buffer | | | | | |
| Margin of Stroke Error(mm) | | +1.0 0 mm | | | | | |
| Precision of Piston rod with Non-rotating | | ±0.8 ^{a)} | | | | | |
| Port Size | | M5×0.8 | | | | | |
| | | G1/8" | | | | | |

■ Note) Φ6 single acting with auto switch type: One side rubber bumper.

Standard Stroke


| Action Type | Bore size(mm) | Standard stroke(mm) |
|---------------|-----------------------|-------------------------------|
| Double Acting | 6, 10, 16 | 5, 10, 15, 20, 25, 30 |
| | 20, 25, 32 | 5, 10, 15, 20, 25, 30, 40, 50 |
| Single Acting | 6, 10, 16, 20, 25, 32 | 5, 10, 15 |

CU Series Free Installation Cylinder


Overall Dimensions

Double Acting, Single Rod

$\phi 6 \sim \phi 10$

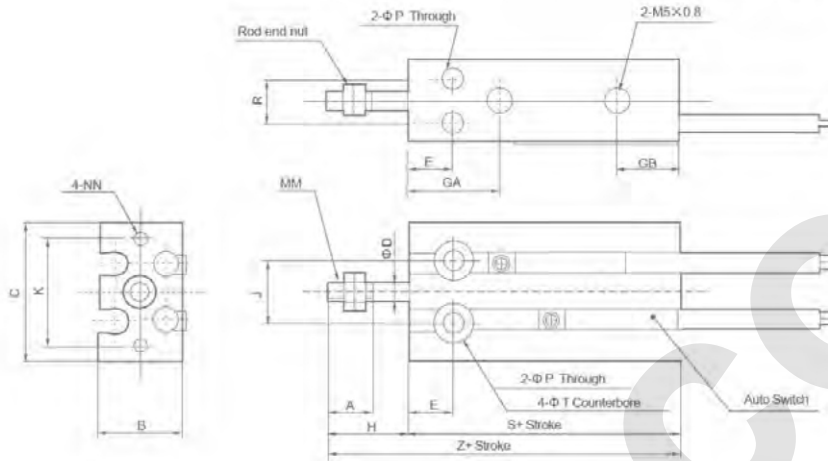

$\phi 16 \sim \phi 32$

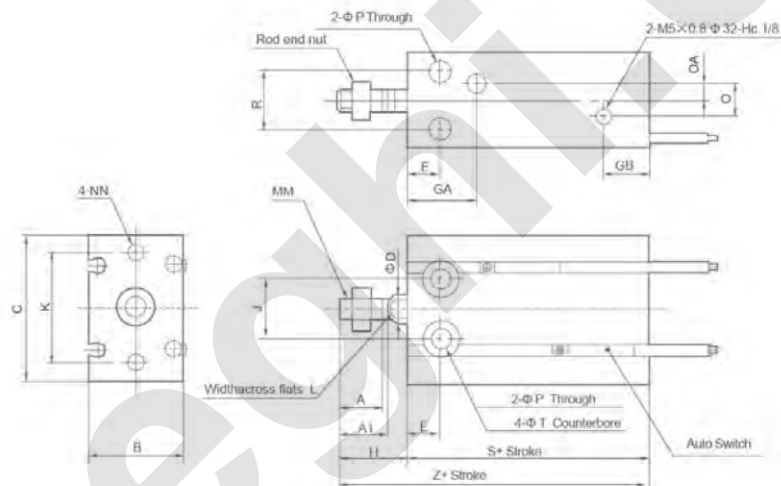

Dimension Sheet

| Bore size(mm) | A | A1 | B | C | D | E | GA | GB | H | K | J | L | MM |
|---------------|------|------|----|----|----|----|-----------------------|------|----|----|----|----|----------|
| 6 | 7 | - | 13 | 22 | 3 | 7 | 15 | 10 | 13 | 17 | 10 | - | M3×0.5 |
| 10 | 10 | - | 15 | 24 | 4 | 7 | 16.5 | 10 | 16 | 18 | 11 | - | M4×0.7 |
| 16 | 11 | 12.5 | 20 | 32 | 6 | 7 | 16.5 ^{Note)} | 11.5 | 16 | 25 | 14 | 5 | M5×0.8 |
| 20 | 12 | 14 | 26 | 40 | 8 | 9 | 19 | 12.5 | 19 | 30 | 16 | 6 | M6×1.0 |
| 25 | 15.5 | 18 | 32 | 50 | 10 | 10 | 21.5 | 13 | 23 | 38 | 20 | 8 | M8×1.25 |
| 32 | 19.5 | 22 | 40 | 62 | 12 | 11 | 23 | 12.5 | 27 | 48 | 24 | 10 | M10×1.25 |


| Bore size (mm) | NN | P | Q | QA | R | T | Without Auto Switch | | With Auto Switch | |
|----------------|----------------|-----|------|-----|----|---------------|---------------------|----|------------------|----|
| | | | | | | | S | Z | S | Z |
| 6 | M3×0.5 depth 5 | 3.2 | - | - | 7 | 6 depth 4.8 | 33 | 46 | 33 | 46 |
| 10 | M3×0.5 depth 5 | 3.2 | - | - | 9 | 6 depth 5 | 36 | 52 | 36 | 52 |
| 16 | M4×0.7 depth 6 | 4.5 | 4 | 2 | 12 | 7.6 depth 6.5 | 30 | 46 | 40 | 56 |
| 20 | M5×0.8 depth 8 | 5.5 | 9 | 4.5 | 16 | 9.3 depth 8 | 36 | 55 | 46 | 65 |
| 25 | M5×0.8 depth 8 | 5.5 | 9 | 4.5 | 20 | 9.3 depth 9 | 40 | 63 | 50 | 73 |
| 32 | M6×1.0 depth 9 | 6.6 | 13.5 | 4.5 | 24 | 11 depth 11.5 | 42 | 69 | 52 | 79 |

Note) S Stroke(CU16-5D):14.5mm

CU Series Free Installation Cylinder


Overall Dimensions

Single Acting, Spring Extend

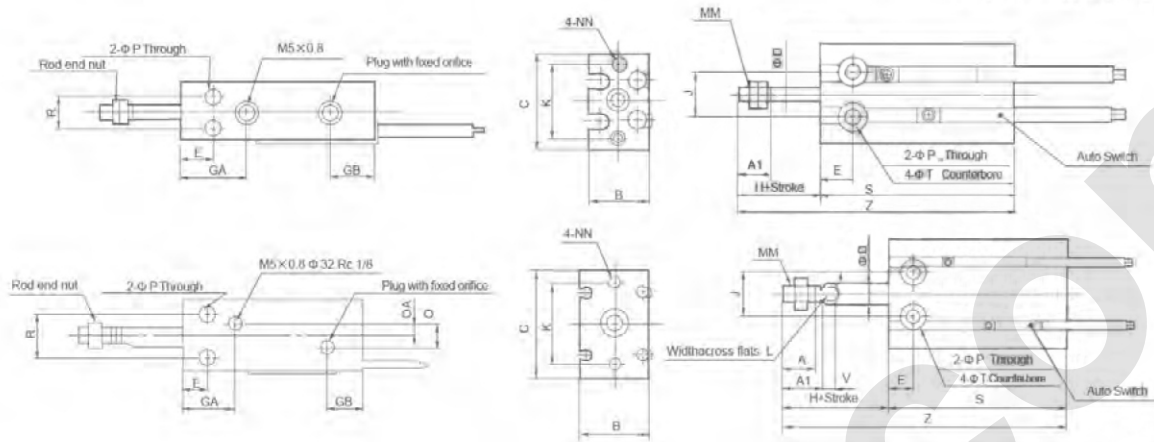

Overall Dimensions

Single Acting, Spring Return

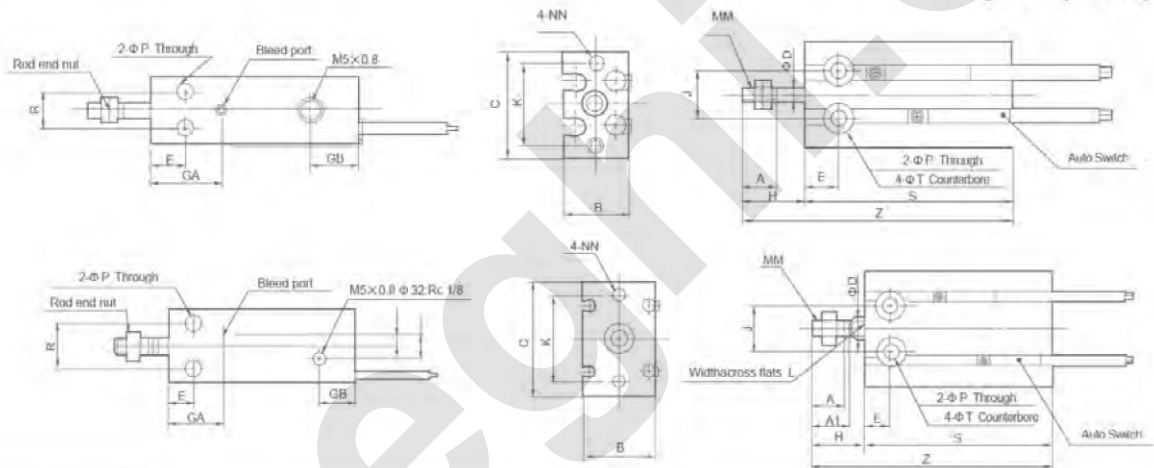

Dimension Sheet

| Bore size (mm) | A | A1 | B | C | D | E | GA | GB | H | K | J | L | MM | NN | P |
|----------------|------|------|----|----|----|----|------|------|----|----|----|----|----------|------------------|-----|
| 6 | 7 | - | 13 | 22 | 3 | 7 | 15 | 10 | 13 | 17 | 10 | - | M3×0.5 | M3×0.5 (depth) 5 | 3.2 |
| 10 | 10 | - | 15 | 24 | 4 | 7 | 16.5 | 10 | 16 | 18 | 11 | - | M4×0.7 | M3×0.5 (depth) 5 | 3.2 |
| 16 | 11 | 12.5 | 20 | 32 | 6 | 7 | 16.5 | 11.5 | 16 | 25 | 14 | 5 | M5×0.8 | M4×0.7 (depth) 6 | 4.5 |
| 20 | 12 | 14 | 26 | 40 | 8 | 9 | 19 | 12.5 | 19 | 30 | 16 | 6 | M6×1.0 | M5×0.8 (depth) 8 | 5.5 |
| 25 | 15.5 | 18 | 32 | 50 | 10 | 10 | 21.5 | 13 | 23 | 38 | 20 | 8 | M8×1.25 | M5×0.8 (depth) 8 | 5.5 |
| 32 | 19.5 | 22 | 40 | 62 | 12 | 11 | 23 | 12.5 | 27 | 48 | 24 | 10 | M10×1.25 | M6×1.0 (depth) 9 | 6.6 |

| Bore size (mm) | Q | QA | R | T | V (Note) | Without Auto Switch | | | | | | With Auto Switch | | | | | |
|----------------|------|-----|----|-----------------|----------|---------------------|------|------|-----|------|------|------------------|------|------|-----|------|------|
| | | | | | | S | | | Z | | | S | | | Z | | |
| | | | | | | 5st | 10st | 15st | 5st | 10st | 15st | 5st | 10st | 15st | 5st | 10st | 15st |
| 6 | - | - | 7 | 6 (depth) 4.8 | - | 38 | 43 | 48 | 56 | 66 | 76 | 38 | 43 | 48 | 56 | 66 | 76 |
| 10 | - | - | 9 | 6 (depth) 5 | - | 41 | 46 | 56 | 62 | 72 | 87 | 41 | 46 | 56 | 62 | 72 | 87 |
| 16 | 4 | 2 | 12 | 7.6 (depth) 6.5 | 3.5 | 45 | 50 | 60 | 66 | 76 | 91 | 45 | 50 | 60 | 66 | 76 | 91 |
| 20 | 9 | 4.5 | 16 | 9.3 (depth) 8 | 5 | 41 | 46 | 56 | 65 | 75 | 90 | 51 | 56 | 66 | 75 | 85 | 100 |
| 25 | 9 | 4.5 | 20 | 9.3 (depth) 9 | 5 | 45 | 50 | 60 | 73 | 83 | 98 | 55 | 60 | 70 | 83 | 93 | 108 |
| 32 | 13.5 | 4.5 | 24 | 11 (depth) 11.5 | 5 | 47 | 52 | 62 | 79 | 89 | 104 | 57 | 62 | 72 | 89 | 99 | 114 |

Note) "V" Only for Single Acting, Spring Extend