


GENERAL FEATURES

- Operation: Normally Closed
- Suitable for air and inert gas
- High reliability, quality and performance
- Body: Die -cast Aluminium
- Diaphragm Seat: Elastomer
- Fluid temperature: 110 °C Max.
- Ambient temperature :100°C Max
- Mounting: Manifold

Normally Closed

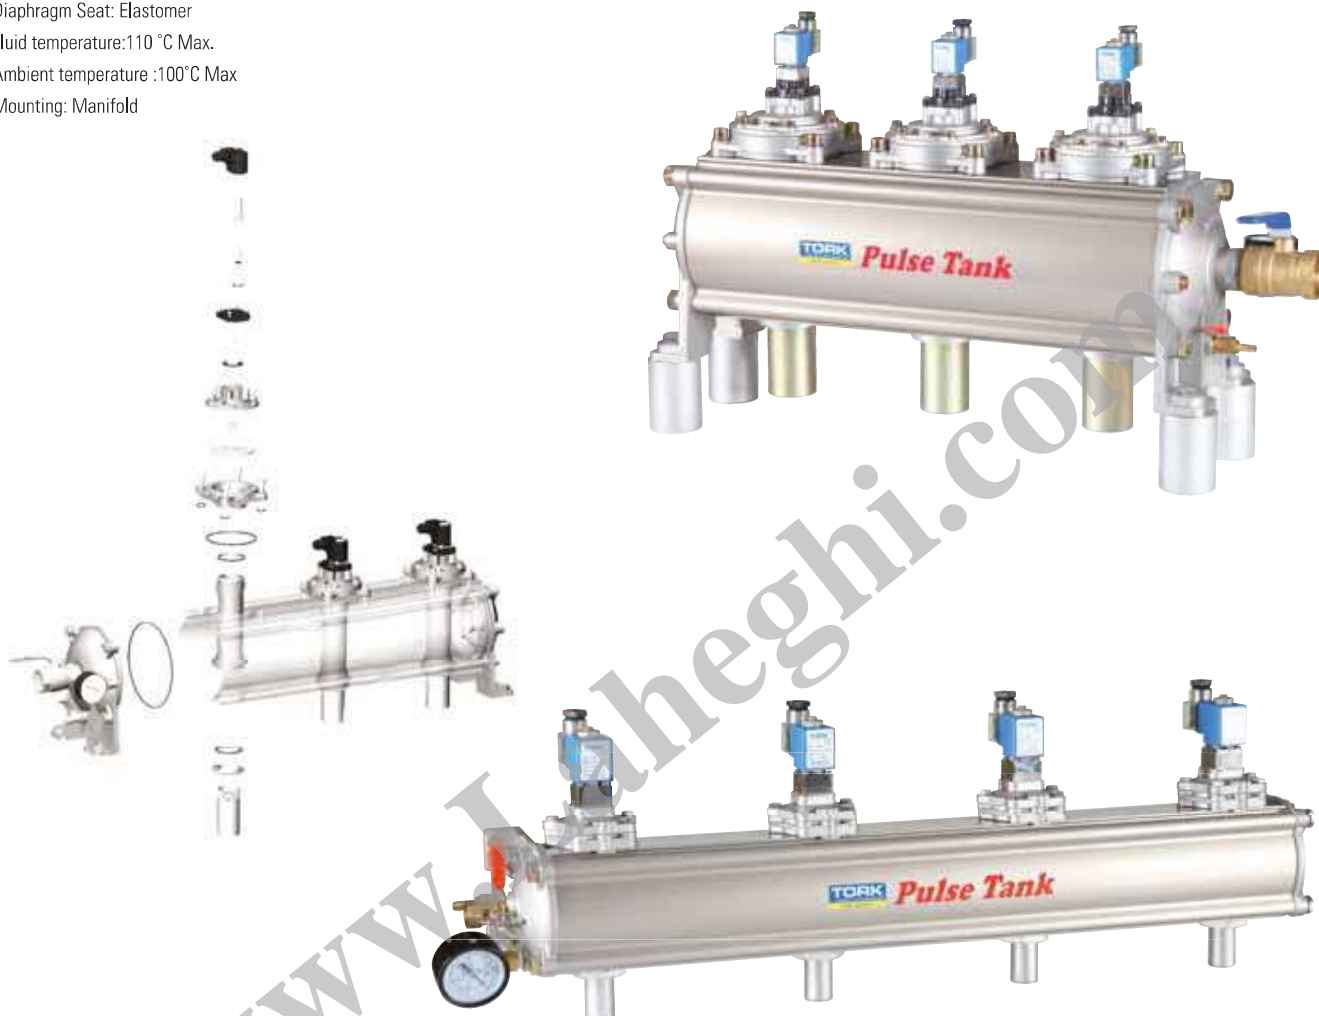

| Valve Type / Order no | Working Pressure | | KV lt/dk | Fluid Temperature °C | |
|-----------------------|------------------|----------|-------------|-------------------------|-----|
| | min. bar | mix. bar | | min | max |
| PL1025.03.15.B.MXN | 0,5 | 7,4 | 141,3 | -20 | 110 |
| PL1025.04.20.B.MXN | 0,5 | 7,4 | 237,9 | -20 | 110 |
| PL1015.04.20.B.MXN | 0,5 | 9,4 | 237,9 | -20 | 110 |
| PL1026.05.25.B.MXN | 0,5 | 7,4 | 591,1 | -20 | 110 |
| PL1036.06.30.B.MXN | 0,5 | 8,4 | 836,2 | -20 | 110 |
| PL1016.06.30.B.MXN | 0,5 | 9,6 | 836,2 | -20 | 110 |
| PL1037.07.40.B.MXN | 0,5 | 8,4 | 1002,0 | -20 | 110 |
| PL1017.07.40.B.MXN | 0,5 | 9,6 | 1002,0 | -20 | 110 |
| PL1037.08.50.B.MXN | 0,5 | 9,4 | 1182,2 | -20 | 110 |
| PL1017.08.50.B.MXN | 0,5 | 9,6 | 1182,2 | -20 | 110 |

B,MXN; B: Position, M: Distance between two pulse valve, N:quantity of pulse valve