

## Compressor Solenoid Valve S5078 Series (G1/8", G1/4")

### GENEL ÖZELLİKLER

- Wide pressure range, flow rate and orific options.
  - Solenoid valves are used with filters.
  - Solenoid valves can be mounted in any position without affecting its operation.
  - Coil to be used in a vertical position.
  - TORK series S5073 direct acting plate mounting compressor solenoid valves are 2/2 way, normally closed and have small body size.
  - Manual override or without manuel override, for small body (1/8" and 1/4"), square type body and easy installation
  - On request; manuel override
- Working temperature:** -10°C / + 160°C
- Don't require any differential pressure.

### ELECTRICAL CHARACTERISTICS

Continuous Duty : ED %100  
 Coil Insulation Class : H (180°C)(IEC 85)  
 Coil Impregnation : Polyester Fiber Glass  
 Ambient Temperature : -10°C, +60°C  
 Protection Degree : IP65 (ISO 60529) On request; IP68  
 Electric Plug Connection : DIN 46340 3-Poles Connector (DIN 43650)  
 Connector Specification : ISO 4400 / EN 175301-803 Form A, Spade Plug (Cable Ø6-8 mm)  
 Electrical Safety : IEC 335  
 Standard Voltages : AC 12V 15VA, 24V 15VA, 48V 15VA, 230V 15VA, 230V 24VA  
 DC 12V 18W, 24V 18W, 48V 18W, 110V 18W

On request other voltages  
 Voltages Tolerance : AC -15%, +10% DC -5%, +10%  
 Frequency : 50 Hz (60 Hz...)  
 On request; Connector with LED, PWM Socket Specify coil voltage with order

### MATERIALS IN CONTACT WITH FLUID

Body : Brass  
 Internal Parts : Stainless Steel  
 Sealing : VITON  
 Shading Ring : Copper (EN 12735-1)  
 Seats, Core Tube, Springs: Stainless Steel

### OPTIONS

- Female connection: BSP; (On request NPT)
- On request CR-Ni plated, PTFE coated done
- On request Atex (exproof) coil.

### TECHNICAL FEATURES

Max. Viscosity : 5°E (-37cST veya mm<sup>2</sup>/s)  
 Response Time : Opening time : 400 - 1600 ms  
 Closing Time : 1000 - 2000 ms

### SEALS FEATURES

NBR : -10°C...+80°C  
 EPDM : -10°C...+130°C  
 VITON : -10°C...+160°C  
 PTFE : -10°C...+180°C  
 RUBY : -10°C...+160°C

### STANDARDS

- Standard tube connection G (BSP) (ISO 228-1) and other tube connections (NPT (ANSI 1.20.3)) are available on request.
- TORK solenoid valves 97/23/EC, are available for pressure equipment directive (PED) and 2006/95/ECC low voltage directive (LVD).

**Not:** Please look catalogues for more details



**NORMALLY CLOSED**


**2/2 WAY**

**DIRECT ACTING**

**ΔP=0**



**COMPRESSOR**

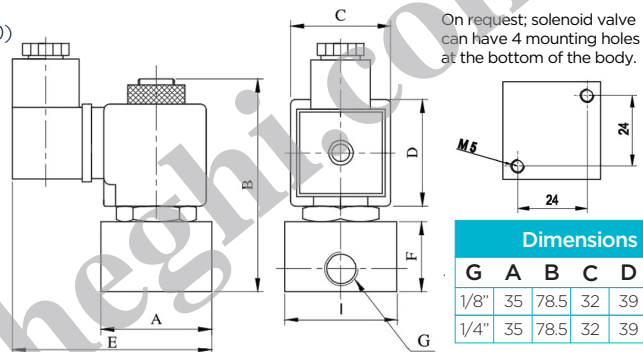

On request; solenoid valve can have 4 mounting holes at the bottom of the body.

**Dimensions (mm)**

	G	A	B	C	D	E	F	I
1/8"	35	78.5	32	39	68	26.5	68	
1/4"	35	78.5	32	39	68	26.5	68	

Coils	Nominal Values	Cold/Hot	Inrush	Holding	Current (A)	Surface Temperature (°C)
C40012VDC18W	12VDC 18W	COLD	19,56	19,56	1,63	20
		HOT	14,52	14,52	1,21	106
C40024VDC18W	24VDC 18W	COLD	20,88	20,88	0,87	25
		HOT	14,64	14,64	0,61	116
C40110VDC18W	110VDC 18W	COLD	19,96	19,96	0,18	23
		HOT	13,56	13,56	0,123	115
C40012VAC15VA	12VAC 15VA	COLD	23,81	16,43	1,3	25
		HOT	-	15,86	1,262	79
C40024VAC15VA	24VAC 15VA	COLD	25,82	15,02	0,62	22
		HOT	-	13,91	0,57	81
C40110VAC15VA	110VAC 15VA	COLD	30,65	15,17	0,137	24
		HOT	-	13,96	0,126	80
C40230VAC15VA	230VAC 15VA	COLD	31,4	15,64	0,068	25
		HOT	-	14,41	0,063	80
C40230VAC24VA	230VAC 24VA	COLD	45,1	23,92	0,0154	23
		HOT	-	21,62	0,0154	100

Solenoid Valve Symbol	Valve Type/Order No	Connection Size	Orifice Size	Pressure min/max	Kv	Seal	Weight
	S5078	G	mm	Bar Bar	Lt/dk	VITON	kg
	S5078.00.30	1/8"	3	0 10	4.6	✓	0,5
	S5078.00.10	1/8"	1	0 100	0.6	✓	0,5
	S5078.00.18	1/8"	1.8	0 16	1.6	✓	0,5
	S5078.01.25	1/8"	2.5	0 12	3.2	✓	0,5
	S5078.00.40	1/8"	4	0 9	6.4	✓	0,5
	S5078.01.30	1/4"	3	0 10	4.6	✓	0,49
	S5078.01.10	1/4"	1	0 100	0.6	✓	0,49
	S5078.01.18	1/4"	1.8	0 16	1.6	✓	0,49
	S5078.01.25	1/4"	2.5	0 12	3.2	✓	0,49
	S5078.01.40	1/4"	4	0 9	6.4	✓	0,49
	S5078.01.50	1/4"	5	0 7	9.2	✓	0,49