

Temperature Gauges / Bi-Metal Thermometers / All-Purpose Bi-Metal Thermometers / Ø 63 mm.

**CONSTRUCTIVE PROPERTIES**

	STANDARD	OPTIONAL
Mounting Type	Back Connection	-
Scale Unit	°C	°F
Scale Range (T)	-30/+60°C   0/+60°C   0/+100°C   0/+120°C   0/+160°C       0/+300°C   0/+350°C   0/+400°C   0/+500°C	
Case	Stainless Steel AISI-430	-
Bezel	AISI-430	-
Window	-30°C ... 120°C Polycarbonate	Glass
Connection	G 1/2" B	1/2" NPT
Dial	Aluminum	-
Pointer	0 - 120 °C ... 160 °C Plastic	0 - 200 °C ... 500 °C Aluminum
Bi-Metal Stem	Brass	-
Temperature Element	Bi-metal	-
Thermowell	Stainless Steel AISI-316	L = 50 Brass
Immersion Length	50mm   100mm   150mm   200mm	


**USAGE PROPERTIES**

Accuracy Class	CL 2.0	-
Protection Rate	IP 51	-
Storage Temperature	-40 ... +70 °C	-
Conformity	EN 13190	-
Max.Pressure	16 bar	-



**TE063DD2**

Temperature Gauges / Bi-Metal Thermometers / All-Purpose Bi-Metal Thermometers / Ø 63 mm.

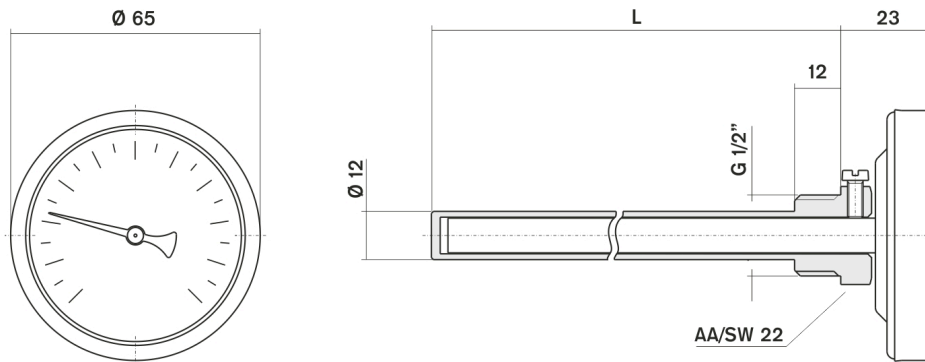

- L = 50
- L = 100
- L = 150
- L = 200
- L = 250
- L = 300
- L = 400
- L = 500
- L = 700
- L = 1000

Model No: TE063DD2

Back Connection

www.Laheghi.com