

Temperature Gauges / Gas Actuated Thermometers / All-Purpose Gas Actuated Thermometers / Ø 40 mm.

CONSTRUCTIVE PROPERTIES

	STANDARD	OPTIONAL
Mounting Type	Back Connection Panel Mounted	-
Scale Range (T)	-40/+40°C 0 / +120 °C 0/+160°C	
Case	Plastic (ABS)	-
Window	Acrylic	-
Dial	Aluminum	-
Pointer	Plastic	-
Capillary Tube	PVC Coated Copper Alloy	-
Capillary Tube Length (T)	1m	2m
Temperature Element	Gas Actuated	-
Bulb Ø	6mm	-




TI040DP3.

USAGE PROPERTIES

Protection Rate	IP 41	-
Optimum Operating Range	Between 0,0 x PN and 1,0 x PN	
Storage Temperature	-20 ... +60 °C	-
Conformity	EN 13190	-

www.Lahneghi.com

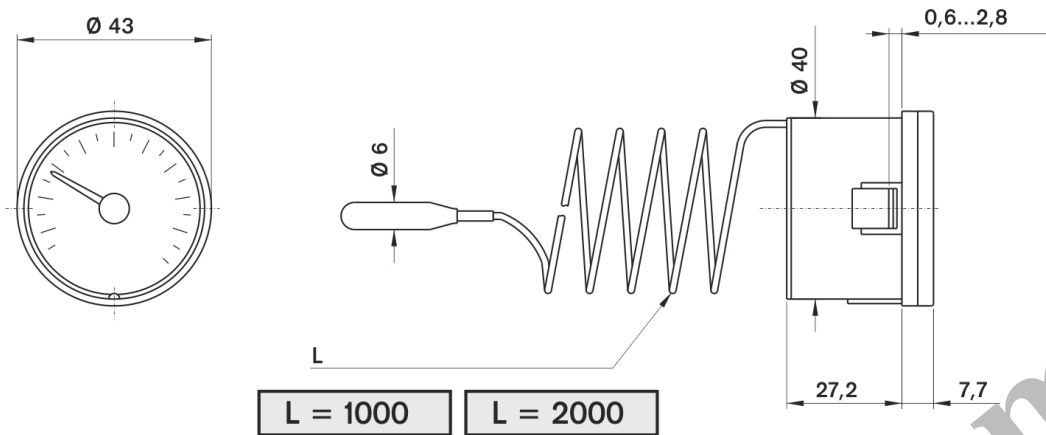


Model No: TI040DP3

Back Connection Panel Mounted

www.Laheghi.com

LIQUID FILLED THERMOMETERS - CL 2.0
THERMO - PRESSURE GAUGES Ø 40 **14.91**

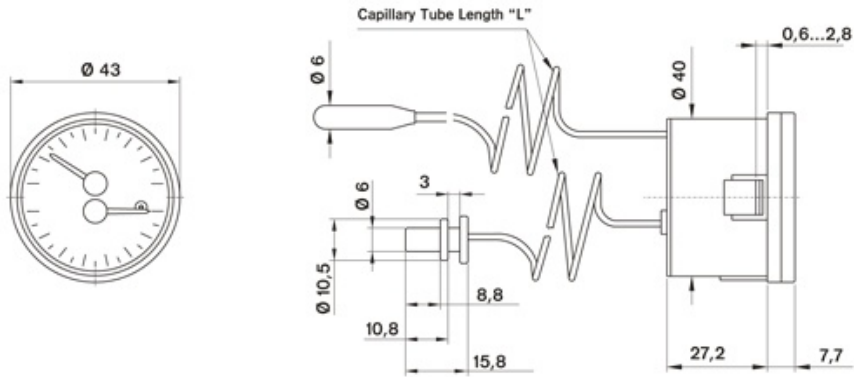

Back Connection Panel Mounted						
Capillary Tube	0 / +120 °C					
	0 / 4 bar	0 / 6 bar	0 / 10 mWS	0 / 16 mWS	0 / 25 mWS	0 / 40 mWS
L=1 000	040 702 1205	040 702 1219	040 702 1200	040 702 1214	040 702 1215	040 702 1216

