

**Temperature Gauges / Combined Gauges / Ø 50 mm.**

**CONSTRUCTIVE PROPERTIES**

	STANDARD	OPTIONAL
Mounting Type	Back Connection Panel Mounted	-
Scale Unit	°C   bar	
Scale Range (PN)	0/4   0/6   0/10   0/16	
Scale Range (T)	0 / +120 °C	-
Case	Plastic (ABS)	-
Bezel	Plastic	-
Window	Acrylic	-
Wetted Parts	Copper Alloy	-
Connection	G 1/4" B	G 1/4" NPT
Dial	Plastic	-
Pointer	Plastic	-
Welding	Soldering	-
Capillary Tube	1 mt. Copper Plaited	2 mt.Copper Plaited
Capillary Tube Length (P)	1m	-
Capillary Tube Length (T)	1m	-
pressure Connection	Brass	-
Temperature Element	Gas Actuated	-




**050702.**

Back Connection

**USAGE PROPERTIES**

Operating Pressure (max.)	Must not exceed %75' of full scale.	
Protection Rate	IP 41	-
Optimum Operating Range	Between 0,1 x PN and 0,75 x PN	
Storage Temperature	-40 ... +70 °C	-
Conformity	EN 13190	-
Accuracy Class (P)	CL 2,5	-
Accuracy Class (T)	CL 2,0	-

Temperature Gauges / Combined Gauges / Ø 50 mm.

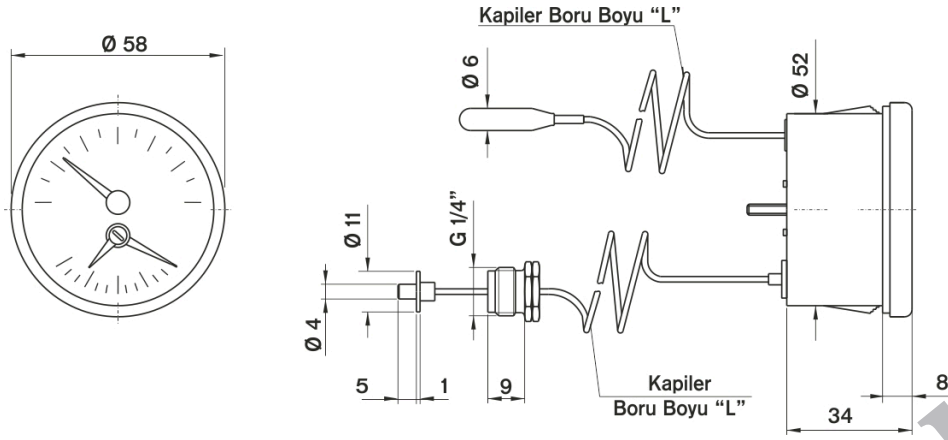

Model No: 050 702

Back Connection Panel Mounted

www.Laheghi.com