


Temperature Gauges / Electrical Contacted Thermometers / Standard Contacted Type / Ø 60 mm.

**CONSTRUCTIVE PROPERTIES**


	STANDARD	OPTIONAL
Mounting Type	Back Connection Panel Mounted	-
Scale Range (T)	-30/+60°C   0 / +120 °C   0/+160°C       0/+300°C   0/+350°C	
Case	Steel (Black Enamelled)	-
Bezel	Stainless Steel AISI-304	-
Window	Acrylic	-
Connection	G 3/8" B	G 1/2" B
Dial	Aluminum	-
Pointer	Plastic	-
Contact Types	1NO	1NC
Capillary Tube	PVC Coated Copper Alloy	-
Capillary Tube Length (T)	2m	10m
Temperature Element	Gas Actuated	-
Bulb Ø	8mm	-

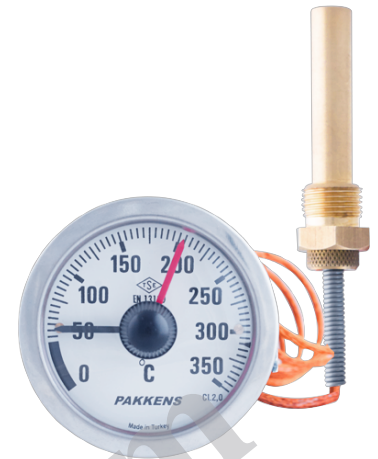

**TK060DP3**

**USAGE PROPERTIES**

Protection Rate	IP 41	-
Optimum Operating Range	Between 0,0 x PN and 1,0 x PN	
Storage Temperature	-20 ... +60 °C	-
Conformity	EN 13190	-

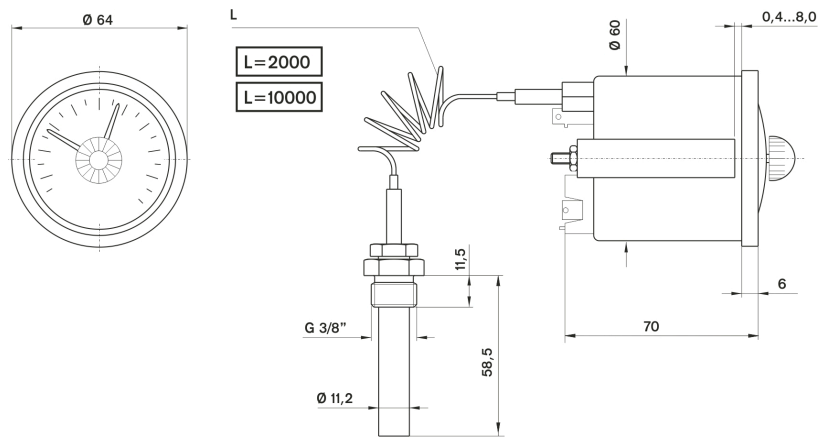

Model No: TK060DP3

www.Laheghi.com